

Cast foot mount




CFM

Product description




A universal mount which is popular for use in a variety of applications. The rubber is loaded in compression and shear, thereby providing a large reduction of vibrations. The steel cover protects it from UV radiation and shields the rubber from any dripping oil or fuel. Available with fastening for mobile installations

Application

Diesel engines, generators, pumps, compressors, vehicles, marine engines and fans.

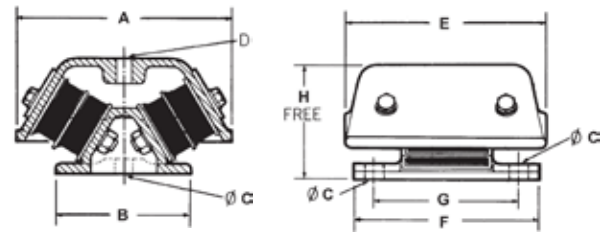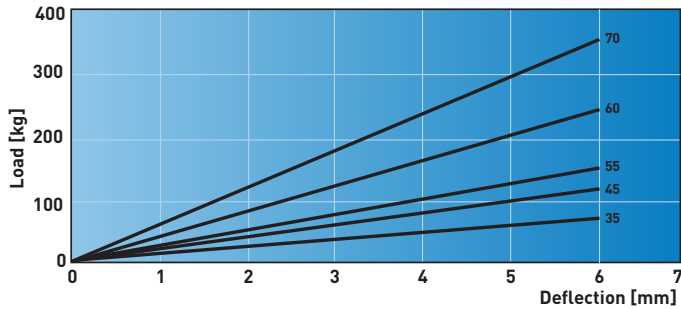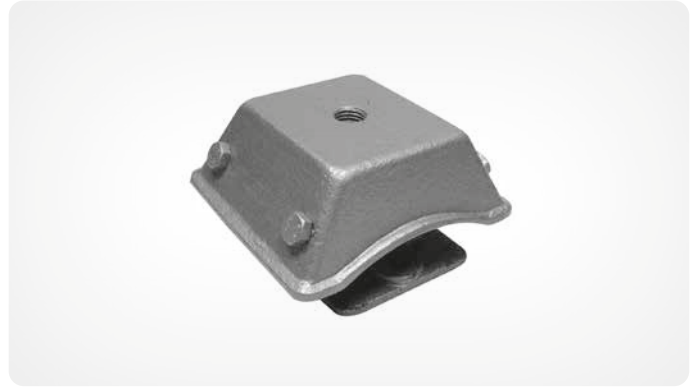

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Stiffness ratio		
									Vertical	Longitudinal	Across
CFM 219	132	82	13	M16	122	114	90	71.5	1.00	0.25	2.00

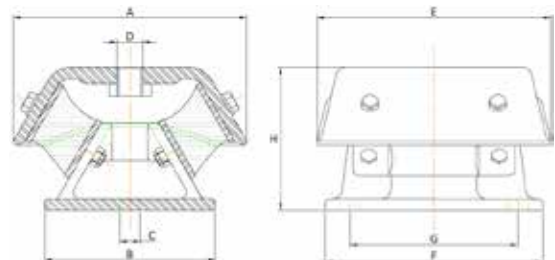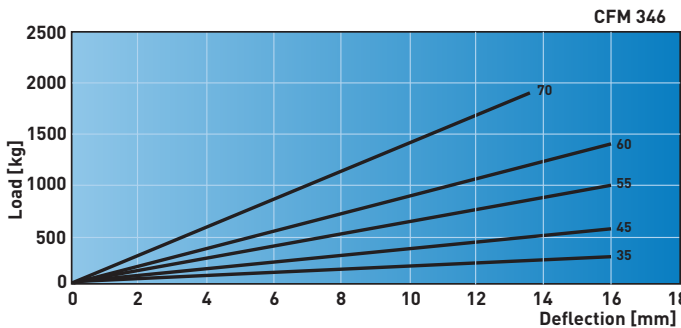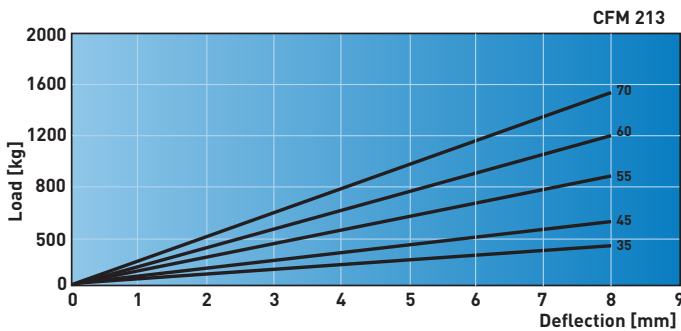

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Stiffness ratio		
									Vertical	Longitudinal	Across
CFM 213	204	146	18	M16	230	205	165	110	1.00	0.25	2.50
CFM 346	204	146	18	M16	230	205	165	120	1.00	0.30	1.70

For freestanding installations, rubber sheets can be supplied for placing under the mount