

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB1600
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL			
	height H (mm)	width W (mm)	weight (kg)
-15	98	115	4,3
-17	104	125	4,6
-20	110	135	4,9
-25	117	145	5,2
-30	125	160	5,6
-40	135	175	6,1
-50	145	185	6,5
-60	160	200	7,0
-70	175	215	7,6

INTERFACES			
fixtures holes D	Bar 1		
	4 through holes ø10,5mm	4 through holes ø10,5mm counter-sunk 90°	4 inserts M10
Bar 2			
4 through holes ø10,5mm	no suffix	not standard	not standard
4 through holes ø10,5mm counter-sunk 90°	CM	CM2	not standard
4 inserts M10	IM	CIM	IM2

C B 1 6 0 0 - 1 5 C I M

SERIE: CB1600

'Helical' mount from the CB1600 series

MODEL: -15

height: 98mm

width: 115mm

weight: 4,3kg

loops: serie


standard is 08 loops




INTERFACE: CIM

4 through holes ø10,5mm

counter-sunk 90° in bar 1,

4 inserts M10 in bar 2

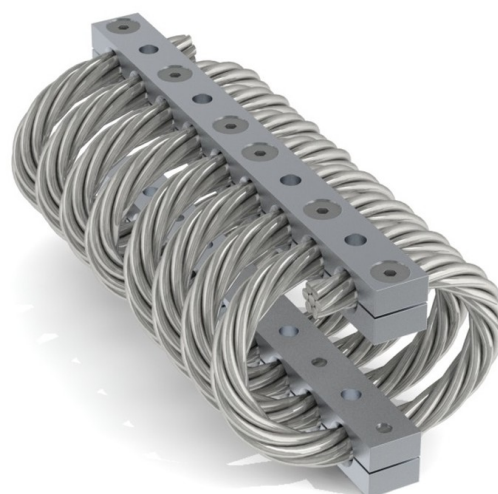

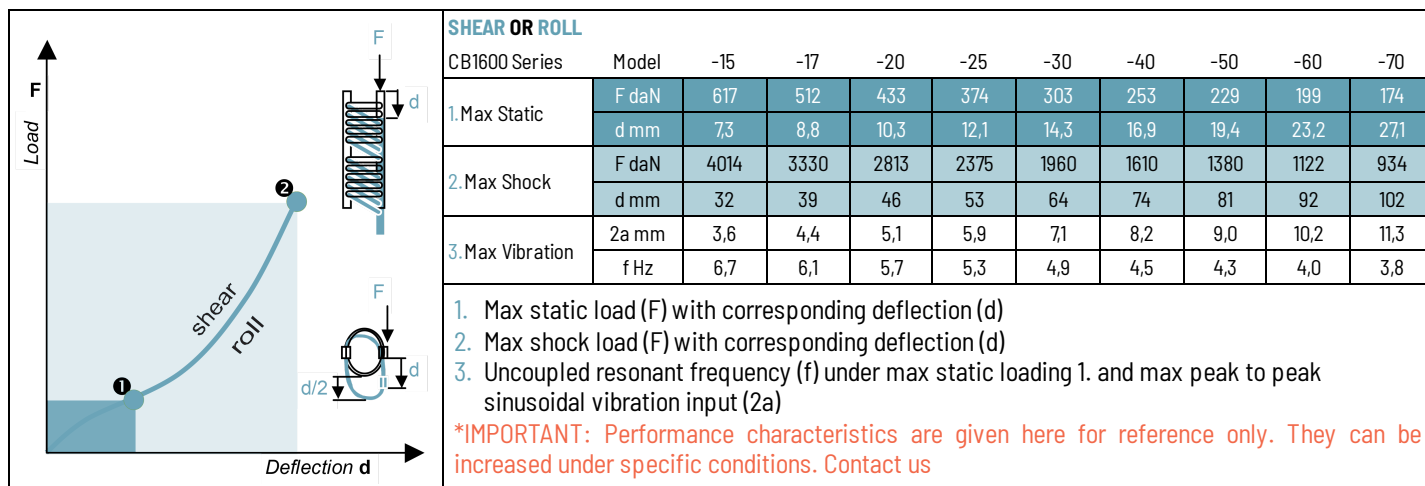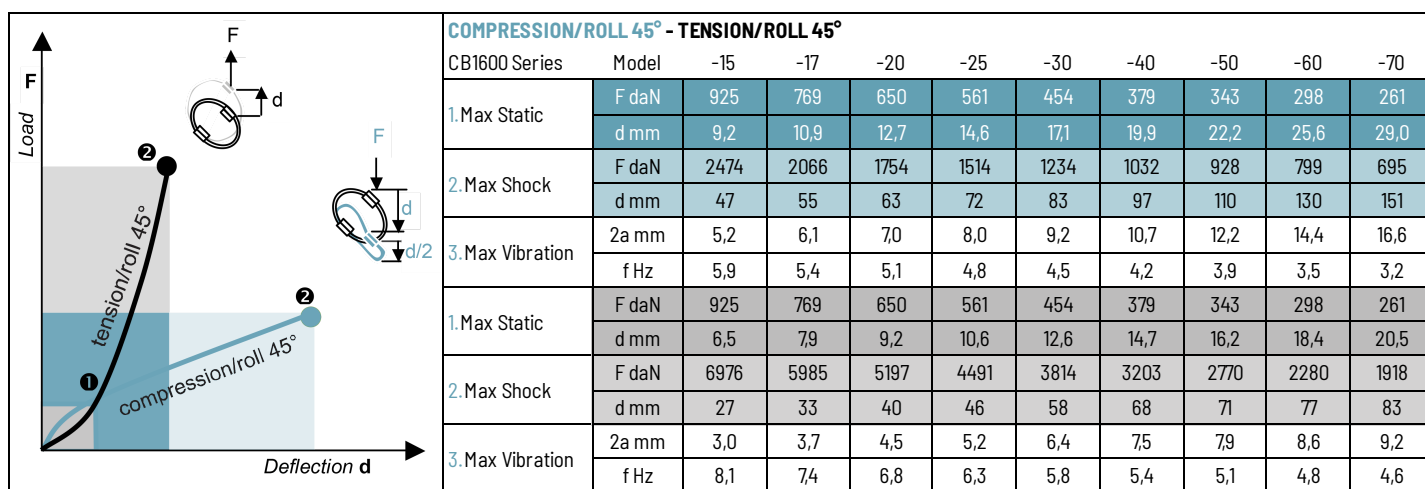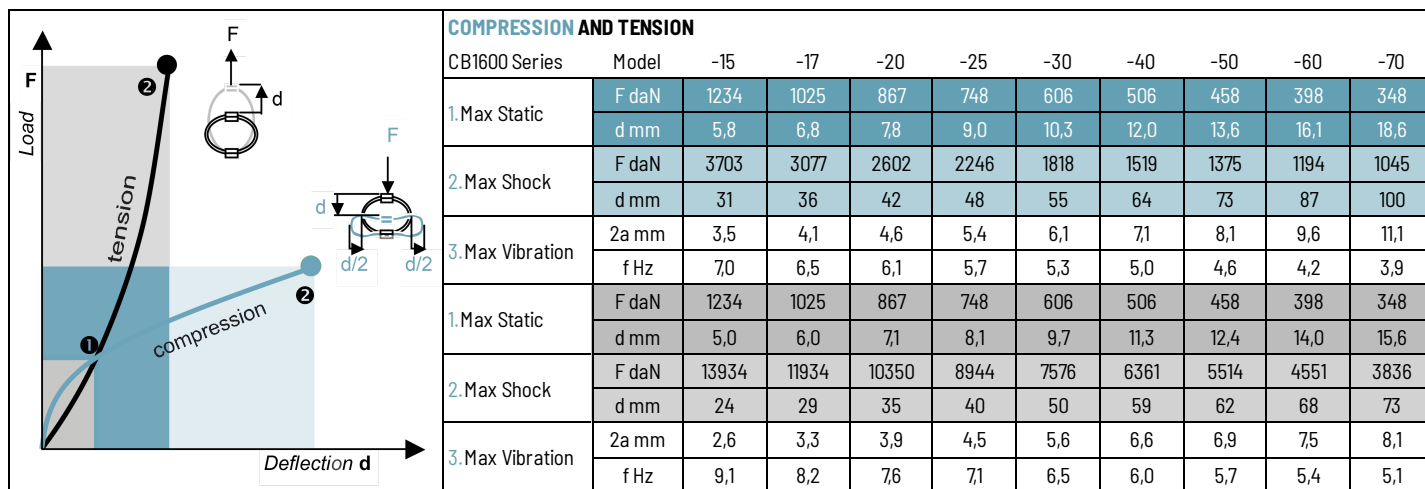

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

- Air** AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
- Ground Forces** GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
- Marine** GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
- Others** GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C